



tubular  
steel  
product range

2 Column

3 Column


4 Column

6 Column



# contents

welcome to Heatline	03
product information	04
specifications	06
accessories	06
technical information per section	07






# welcome to Heatline...

Reliable and affordable, Heatline is fast becoming one of the leading manufacturers of heating equipment in the UK, offering a comprehensive portfolio of radiator solutions for your heating needs.

With more than 50 years of manufacturing experience we've established an enviable reputation for producing cost effective, high efficiency equipment that's easy to install and maintain.

Heatline's extensive range of traditional tubular steel radiators offers a style and size to complement any setting, with the added peace of mind of our 10 year manufacturing guarantee.

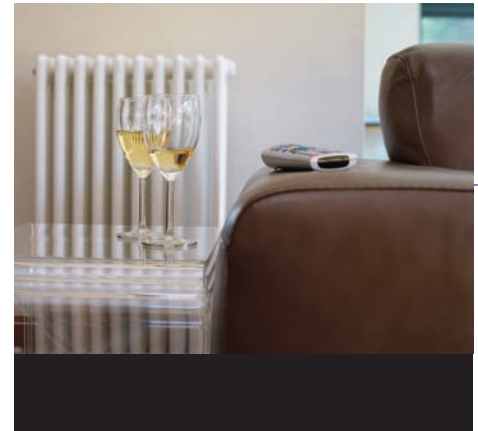

03



# tubular steel product information

**Sizes:** 37

**Types:** 7

**Colour RAL:** 9010

**Pressure tested to:** 10 BAR

**Guarantee:** 10 Years

2 column – 600mm high

2 column – 1800mm high

3 column – 600mm high

4 column – 400mm high

4 column – 600mm high

4 column – 750mm high

6 column – 300mm high

Our elegant and stylish Tubular Steel Radiator comes with a hard wearing and high quality paint finish. Innovative manufacturing techniques produce a near-invisible weld on our comprehensive range of sizes.

- Available in a variety of column numbers and heights
- Multiple size options
- Epoxy powder coated individually by section in white, RAL 9010
- Pressure tested to 10 bar, maximum working pressure 8 bar
- BS EN 442 tested and certified
- Guaranteed for 10 years for manufacturing defects only.



# technical specifications

## traditional tubular steel radiators -

Traditional Tubular Rads		Article Number	Nef. wt. (kg)	Length (mm)	Depth (mm)	Height (mm)	Outputs Watts	Outputs BTUs
2 Col.	Sec.							
2/600	10	0020085259	9.6	450	66	592	440	1501
	13	0020085260	12.5	585	66	592	572	1951
	17	0020085261	16.3	765	66	592	748	2552
	22	0020085262	21.1	990	66	592	968	3302
	26	0020085263	25.0	1170	66	592	1144	3903
	30	0020085264	28.8	1350	66	592	1320	4503
2/1800	4	0020085265	10.0	180	66	1792	496	1692
	6	0020085266	15.1	270	66	1792	744	2539
	8	0020085267	20.1	360	66	1792	992	3385
	10	0020085268	25.1	450	66	1792	1240	4231
	12	0020085269	30.1	540	66	1792	1488	5077
3 Col.	Sec.							
3/600	6	0020085270	8.5	270	107	592	372	1269
	8	0020085271	11.4	360	107	592	496	1692
	10	0020085272	14.2	450	107	592	620	2115
	14	0020085273	19.9	630	107	592	868	2961
	18	0020085274	25.6	810	107	592	1116	3807
	22	0020085275	31.2	990	107	592	1364	4653
	26	0020085276	36.9	1170	107	592	1612	5499
	30	0020085277	42.6	1350	107	592	1860	6345
	4 Col.	Sec.						
4/400	10	0020085278	10.9	450	148	392	560	1911
	13	0020085279	14.2	585	148	392	728	2484
	16	0020085280	17.4	720	148	392	896	3058
	22	0020085281	24.0	990	148	392	1232	4204
	26	0020085282	28.3	1170	148	392	1456	4969
	30	0020085283	32.7	1350	148	392	1680	5733
4/600	10	0020085284	19.3	450	148	592	800	2730
	13	0020085285	25.1	585	148	592	1040	3549
	17	0020085286	32.8	765	148	592	1360	4641
	22	0020085287	42.5	990	148	592	1760	6006
	26	0020085288	50.2	1170	148	592	2080	7098
4/750	10	0020085289	57.9	1350	148	592	2400	8190
	10	0020085290	23.1	450	148	742	990	3378
	14	0020085291	32.3	630	148	742	1386	4729
	18	0020085292	41.6	810	148	742	1782	6080
6 Col.	Sec.							
	18	0020085293	50.8	990	148	742	2178	7432
6/300	13	0020085294	19.5	585	230	292	819	2795
	18	0020085295	27.0	810	230	292	1134	3870

\* C/C TAPPINGS mm – distance between pipe centre.

Heat output  $\Delta T 50^{\circ}\text{C}$  mean water temperature of  $70^{\circ}\text{C}$  and room temperature of  $20^{\circ}\text{C}$ .

Product guarantee covers manufacturing or material defects only. Does not cover defects caused by faulty installation.

Due to constant improvements on products we reserve the right to alter specifications and prices at any time without prior notice.

## accessories


### thermostatic radiator valve

TRV's	
LTC15	15mm Thermostatic Radiator Valve
LTC15C	15mm Chrome Thermostatic Radiator Valve and Lockshield
LTC10	10mm Thermostatic Radiator Valve
LTC8	8mm Thermostatic Valve

### tubular steel feet (tsf)



## technical information per section

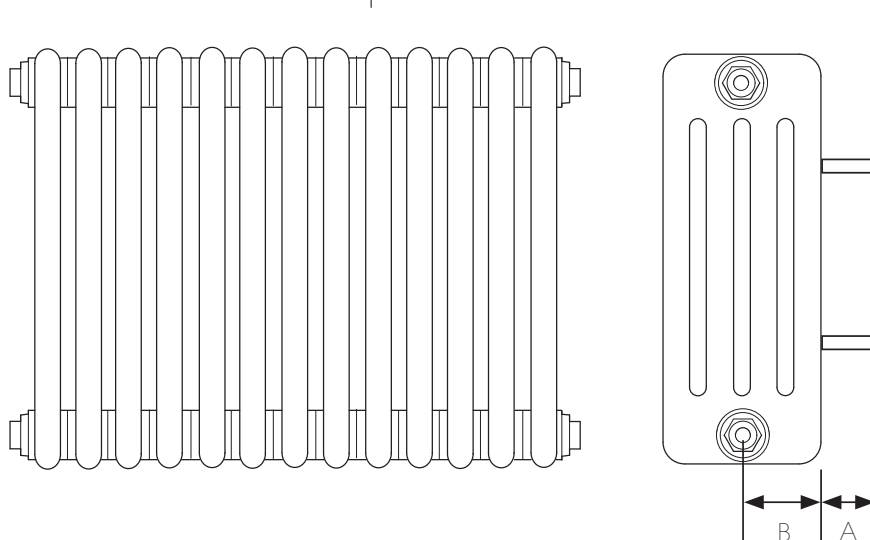

Model	6/300	4/750	4/600	4/400	3/600	2/1800	2/600
No of Columns	6	4	4	4	3	2	2
Height (mm)	292	742	592	392	592	1792	592
Depth (mm)	230	148	148	148	107	66	66
Output Watts $\Delta T_{50^{\circ}\text{C}}$	63	99	80	56	62	124	44
Water Content (l)	1.35	1.62	1.38	1.06	1.03	1.65	0.69
Weight (kg)	1.5	2.3	1.9	1.1	1.4	2.5	0.96
A	40-55	40-55	40-55	40-55	40-55	40-55	40-55
B	115	74	74	74	53	33	33

## note

Feet can be used for additional support, adjustable 125mm - 150mm.  
(150mm Recommended Minimum Clearances below radiator.)





Heatline  
Nottingham Road,  
Belper,  
Derbyshire,  
DE56 1JT

Tel: 01773 596 099  
Fax: 01773 828 123  
Email: [sales@heatline.co.uk](mailto:sales@heatline.co.uk)